

Catalog Number	
Notes	Type

HLWPC2

Wallpack® Full Cutoff LED



Mechanical

- Heavy grade A360 cast aluminum (aluminum with <1% copper)
- Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering
- Mounts to a standard junction box
- Wet location listed
- IP65 rated housing, down light only
- 3/4" painted threaded entry (3/4" - 14 NPT) on each side and on top, accepts 3/4" and 1/2" conduit
- 3/4" threaded plugs are painted on each side
- Vibration tested to 1.5G per ANSI C136.31.

Electrical

- Certified by UL or CSA
- Rated for -40°C (-40°F) minimum ambient
- A programmable electronic driver with 0-10V control leads
- Available in: 120-277V 50/60 Hz and 347-480V 50/60 Hz,
- Standard: 3000K, 4000K and 5000K CCT (>70 CRI)
- Optional >80 CRI (3000K, 4000K and 5000K CCT)
- Internally mounted emergency battery backup for operation in an ambient temperature ranging from -20°C (-4°F) to 30°C (86°F), available with P10 thru P40 performance packages, non CEC compliant
- All surge protection meets ANSI/IEEE C62.41.2 10kV/10kA
- Standard surge protection is 20kV/10kA per ANSI C136.2
- Optional surge protection is 10kV/5kA per ANSI C136.2

Optical

- Light engine housing is IP66 rated
- Acrylic optical system
- Type V: E (entry), M (medium), R (rectangle) & W (wide)
- Asymmetric

Controls

- Field adjustable output (AO)
- Button style photocontrol (PE)
- Motion sensor & ambient photocontrol combination for mounting low (8-15') (MASL) and high (15-30') (MASH) mounting heights






Certification and Standards

- Luminaire is CSA listed, US and Canada
- Suitable for operation in an ambient temperature up to 40°C/104°F per UL or CSA certification
- Design Lights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
- LM-79 compliant
- The projected LED Lumen Maintenance shall be based only on IES LM-80-08 and TM-21

Warranty

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

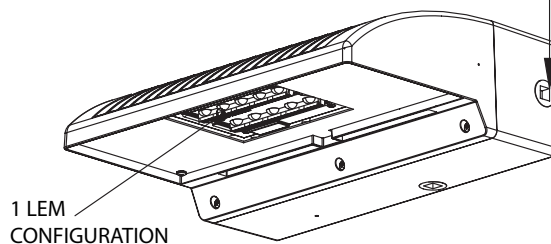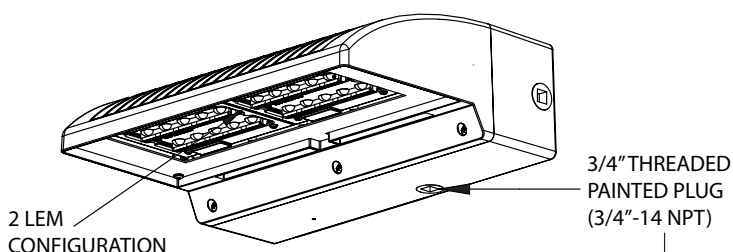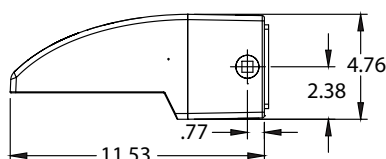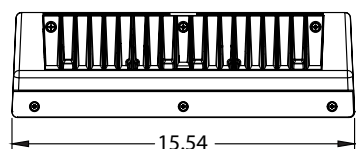

Note: Maximum weight 22 lbs.

ORDERING INFORMATION


Example: HLWPC2 P20 40K AS T3M BZSDP

Series	Lumen Package	Color Temperature	Voltage	Optics	Color	CRI
HLWPC2 Wallpack Full Cutoff LED	1 LEM Package	AMB True Amber	120 120 volts	T2S Type 2 Short	BKSDP Black	Blank 70 CRI (STD)
	P10 3,100 lm	30K 3,000 K CCT	208 208 volts	T2M Type 2 Medium	BZSDP Bronze	80CRI 80 CRI
	P20 5,600 lm	40K 4,000 K CCT	240 240 volts	T3S Type 3 Short	GYSDP Grey	
		50K 5,000 K CCT	277 277 volts	T3M Type 3 Medium	WHSDP White	
	2 LEM Package		347 347 volts	T4M Type 4 Medium		
	P30 7,800 lm		480 480 volts	TFTM Forward Throw Medium		
	P40 9,900 lm		HVOLT 347/480 volts	ASYDF Asymmetric Diffuse		
	P50 11,700 lm		MVOLT 120-277 volts	SYMDF Symmetric Diffuse		
	(Nominal Lumens, 4000K)					


Options:		
<p>Adjustable/Programmable Options</p> <p>A0 Field Adjustable Output</p> <p>Circuit Options</p> <p>2CI 2 Independent Circuits</p> <p>Control - Motion Sensor Options</p> <p>MASL Motion / Ambient Sensor, 8-15' Mounting Height Ambient Sensor Enabled at 1 FC</p> <p>MASH Motion / Ambient Sensor, 15-30' Mounting Height Ambient Sensor Enabled at 1 FC</p>	<p>Control - Photocontrol Options</p> <p>PE Button Style Photocontrol</p> <p>P3 N.E.M.A. Twistlock Receptacle Mount -3 PIN</p> <p>P7 N.E.M.A. Twistlock Receptacle Mount -7 PIN</p> <p>PCLL DTL Long Life Twistlock Photocontrol for Solid State</p> <p>PSC Shorting Cap</p>	<p>Fuse Option</p> <p>SF Single Fuse</p> <p>DF Double Fuse</p> <p>Safety Option</p> <p>EM Integral Emergency Battery</p> <p>TP Tamper Resistant Hardware</p> <p>Surge Protection Option - 20kV/10kA is Standard</p> <p>10KV 10kV/5kA Surge Protection, in place of 20kV/10kA</p>

Options Location


Motion/Ambient Sensor mount options for Low (8-15') (MASL) and Height (15-30') (MASH) applications

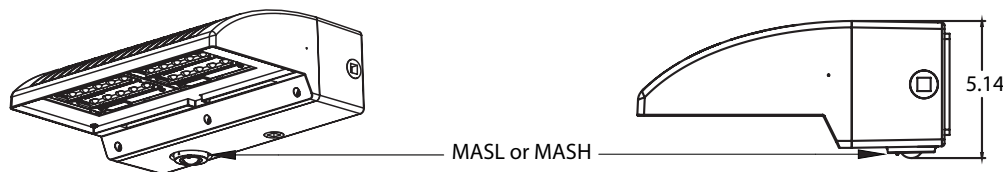


N.E.M.A. Twistlock Receptacle P3 and P7 Options, P7 Shown

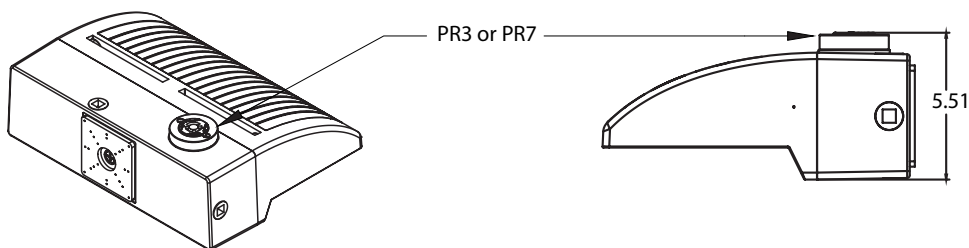

Internal Emergency Battery Test Button - EM Option

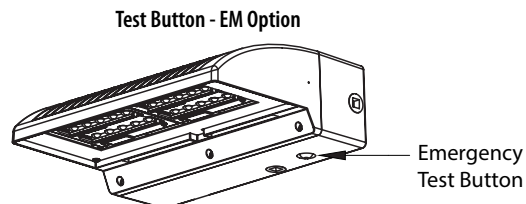


Button Style Photocontrol - PE Option

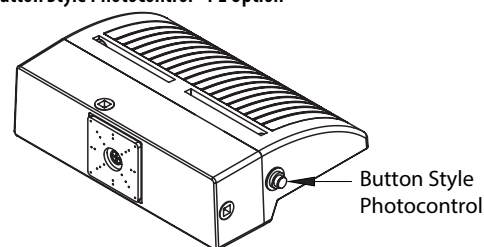

Driver & LEM Configuration Based on Circuit Options

Number of LEMs & Drivers / Circuit		Single Circuit (std.)		Two Circuit (2CI option)	
		LEMs	Drivers	LEMs	Drivers
Lumen Maintenance Factor	P10	1	1	-	-
	P20	1	1	2	2
	P30	2	1	2	2
	P40	2	1	2	2
	P50	2	1	-	-


1 LEM Luminaire

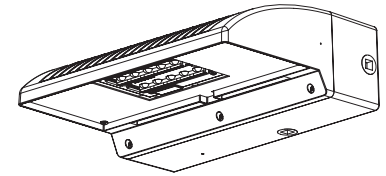

SPD Based on Circuit Options

Number of LEMs & Drivers / Circuit		Single Circuit (std.)				Two Circuit (2CI option)			
		LEMs	Drivers	No. of SPDs	SPD	LEMs	Drivers	No. of SPDs	SPD
Lumen Maintenance Factor	P10	1	1	1	20kV/10kA	-	-	-	-
	P20	1	1	1	20kV/10kA	2	2	2	10kV/5kA
	P30	2	1	1	20kV/10kA	2	2	2	10kV/5kA
	P40	2	1	1	20kV/10kA	2	2	2	10kV/5kA
	P50	2	1	1	20kV/10kA	-	-	-	-

2 LEM Luminaire

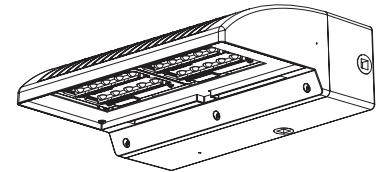

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platform noted in a 25°C ambient, based on 6,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

The italicized data is extrapolated beyond the TM-21 standard.

$$E = (LM) \times (CU) \times (LAT) \times (LLD)$$

LM and CU are obtained from published photometry.

Operating Hours (Standard)		0	25,000	30,000	36,000	45,000	50,000	60,000	75,000	100,000
		Lumen Maintenance Factor	P10	1	0.98	0.97	0.96	0.96	0.95	0.95
P20	1		0.97	0.95	0.94	0.93	0.92	0.90	0.88	0.85
P30	1		0.98	0.97	0.96	0.96	0.95	0.95	0.94	0.92
P40	1		0.97	0.95	0.94	0.93	0.92	0.90	0.88	0.85

Operating Hours (2CI Option)		0	25,000	30,000	36,000	45,000	50,000	60,000	75,000	100,000
		Lumen Maintenance Factor	P10	1	0.99	0.99	0.99	0.99	0.99	0.99
P20	1		0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.99
P30	1		0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
P40	1		0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.97

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Single Circuit Application

Ambient		P10	P20	P30	P40	P50
0°C	32°F	1.02	1.03	1.03	1.04	1.05
10°C	50°F	1.01	1.02	1.02	1.03	1.03
20°C	68°F	1.01	1.01	1.01	1.01	1.01
25°C	77°F	1.00	1.00	1.00	1.00	1.00
30°C	86°F	0.99	0.99	0.99	0.99	0.99
40°C	104°F	0.98	0.97	0.98	0.97	0.97

Optional Two Independent Circuit (2CI) Application

Ambient		P20	P30	P40
0°C	32°F	1.02	1.02	1.02
10°C	50°F	1.01	1.01	1.02
20°C	68°F	1.00	1.01	1.01
25°C	77°F	1.00	1.00	1.00
30°C	86°F	0.99	0.99	0.99
40°C	104°F	0.98	0.98	0.98

Electrical Load

Single Circuit Application

LEDs	Drive Current (mA)	System Watts/Circuit	Current (A)					
			120	208	240	277	247	480
P10	700	28	0.23	0.13	0.12	0.10	0.08	0.06
P20	1400	47	0.41	0.24	0.20	0.18	0.14	0.10
P30	1050	71	0.63	0.37	0.32	0.29	0.22	0.18
P40	1420	95	0.78	0.45	0.40	0.35	0.27	0.20
P50	1720	115	0.95	0.55	0.48	0.42	0.33	0.24

Optional Two Independent Circuit (2CI) Application

LEDs	Drive Current (mA)	System Watts/Circuit	Current (A)					
			120	208	240	277	247	480
P10	-	-	-	-	-	-	-	-
P20	700	22	0.10	0.06	0.05	0.04	-	-
P30	1000	32	0.14	0.08	0.07	0.06	-	-
P40	1250	47	0.18	0.10	0.09	0.08	-	-
P50	-	-	-	-	-	-	-	-

Operating Characteristics

LED Package	Distribution	System Watts	30K (3000K, 70 CRI)					40K (4000K, 70 CRI)					50K (5000K, 70 CRI)				
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
P10	T2S	28	2,904	104	1	0	1	3,128	112	1	0	1	3,168	113	1	0	1
	T2M	28	2,887	103	1	0	1	3,110	111	1	0	1	3,149	112	1	0	1
	T3S	28	2,964	106	1	0	1	3,194	114	1	0	1	3,234	116	1	0	1
	T3M	28	2,801	100	1	0	1	3,017	108	1	0	1	3,055	109	1	0	1
	T4M	28	2,858	102	1	0	1	3,079	110	1	0	1	3,118	111	1	0	1
	TFTM	28	2,979	106	1	0	1	3,209	115	1	0	1	3,250	116	1	0	1
	SYMDF	28	2,771	99	1	0	1	2,986	107	1	0	1	3,023	108	1	0	1
	ASYDF	28	2,756	98	1	0	1	2,969	106	1	0	1	3,007	107	1	0	1
P20	T2S	47	5,303	113	1	0	1	5,713	122	1	0	1	5,785	123	1	0	1
	T2M	47	5,272	112	1	0	2	5,680	121	1	0	2	5,751	122	1	0	2
	T3S	47	5,414	115	1	0	2	5,832	124	1	0	2	5,906	126	1	0	2
	T3M	47	5,115	109	1	0	2	5,510	117	1	0	2	5,580	119	1	0	2
	T4M	47	5,220	111	1	0	2	5,623	120	1	0	2	5,694	121	1	0	2
	TFTM	47	5,440	116	1	0	2	5,861	125	1	0	2	5,935	126	1	0	2
	SYMDF	47	5,062	108	2	0	2	5,453	116	2	0	2	5,522	117	2	0	2
	ASYDF	47	5,033	107	1	0	1	5,422	115	2	0	1	5,491	117	2	0	1
P30	T2S	71	7,319	103	2	0	2	7,884	111	2	0	2	7,984	112	2	0	2
	T2M	71	7,276	102	2	0	2	7,838	110	2	0	2	7,937	112	2	0	2
	T3S	71	7,472	105	1	0	2	8,049	113	2	0	2	8,151	115	2	0	2
	T3M	71	7,059	99	2	0	2	7,604	107	2	0	2	7,700	108	2	0	2
	T4M	71	7,203	101	2	0	2	7,760	109	2	0	2	7,858	111	2	0	2
	TFTM	71	7,508	106	1	0	2	8,088	114	2	0	2	8,190	115	2	0	2
	SYMDF	71	6,985	98	2	0	2	7,525	106	3	0	3	7,620	107	3	0	3
	ASYDF	71	6,946	98	2	0	2	7,483	105	2	0	2	7,578	107	2	0	2
P40	T2S	95	9,320	98	2	0	2	10,041	106	2	0	2	10,168	107	2	0	2
	T2M	95	9,266	98	2	0	2	9,982	105	2	0	3	10,108	106	2	0	3
	T3S	95	9,515	100	2	0	2	10,251	108	2	0	2	10,381	109	2	0	2
	T3M	95	8,989	95	2	0	2	9,684	102	2	0	2	9,807	103	2	0	2
	T4M	95	9,174	97	2	0	2	9,883	104	2	0	3	10,008	105	2	0	3
	TFTM	95	9,561	101	2	0	2	10,300	108	2	0	2	10,431	110	2	0	2
	SYMDF	95	8,896	94	3	0	3	9,583	101	3	0	3	9,705	102	3	0	3
	ASYDF	95	8,846	93	2	0	2	9,530	100	2	0	2	9,650	102	2	0	2
P50	T2S	115	10,972	95	2	0	2	11,820	103	2	0	2	11,969	104	2	0	2
	T2M	115	10,908	95	2	0	3	11,751	102	2	0	3	11,900	103	2	0	3
	T3S	115	11,202	97	2	0	2	12,067	105	2	0	2	12,220	106	2	0	2
	T3M	115	10,582	92	2	0	2	11,400	99	2	0	3	11,544	100	2	0	3
	T4M	115	10,799	94	2	0	3	11,634	101	2	0	3	11,781	102	2	0	3
	TFTM	115	11,256	98	2	0	2	12,126	105	2	0	2	12,279	107	2	0	2
	SYMDF	115	10,472	91	3	0	3	11,282	98	3	0	3	11,424	99	3	0	3
	ASYDF	115	10,414	91	2	0	2	11,219	98	3	0	2	11,361	99	3	0	2

Use the following to scale 70CRI to 80CRI.

CCT	Multiplier
3000K	0.909
4000K	0.886
5000K	0.865

All IES files available on product web page

Operating Characteristics (continued)

LED Package	Distribution	System Watts	30K + 2CI Option (3000K, 70 CRI)					40K + 2CI Option (4000K, 70 CRI)					50K + 2CI Option (5000K, 70 CRI)				
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
P20	T2S	49	5,015	102	1	0	1	5,402	110	1	0	1	5,471	112	1	0	1
	T2M	49	4,985	102	1	0	2	5,371	110	1	0	2	5,439	111	1	0	2
	T3S	49	5,120	104	1	0	1	5,515	113	1	0	2	5,585	114	1	0	2
	T3M	49	4,837	99	1	0	2	5,210	106	1	0	2	5,276	108	1	0	2
	T4M	49	4,936	101	1	0	2	5,317	109	1	0	2	5,385	110	1	0	2
	TFTM	49	5,144	105	1	0	2	5,542	113	1	0	2	5,612	115	1	0	2
	SYMDF	49	4,786	98	2	0	2	5,156	105	2	0	2	5,222	107	2	0	2
ASYDF	49	4,760	97	1	0	1	5,127	105	1	0	1	5,192	106	1	0	1	
P30	T2S	70	6,769	97	1	0	1	7,293	104	2	0	2	7,385	106	2	0	2
	T2M	70	6,730	96	2	0	2	7,250	104	2	0	2	7,342	105	2	0	2
	T3S	70	6,911	99	1	0	2	7,445	106	1	0	2	7,539	108	1	0	2
	T3M	70	6,529	93	2	0	2	7,033	100	2	0	2	7,123	102	2	0	2
	T4M	70	6,663	95	2	0	2	7,178	103	2	0	2	7,269	104	2	0	2
	TFTM	70	6,945	99	1	0	2	7,481	107	1	0	2	7,576	108	2	0	2
	SYMDF	70	6,461	92	2	0	2	6,960	99	2	0	2	7,049	101	2	0	2
ASYDF	70	6,425	92	2	0	2	6,922	99	2	0	2	7,009	100	2	0	2	
P40	T2S	89	8,370	94	2	0	2	9,017	101	2	0	2	9,131	103	2	0	2
	T2M	89	8,321	93	2	0	2	8,964	101	2	0	2	9,078	102	2	0	2
	T3S	89	8,545	96	2	0	2	9,205	103	2	0	2	9,322	105	2	0	2
	T3M	89	8,073	91	2	0	2	8,696	98	2	0	2	8,807	99	2	0	2
	T4M	89	8,238	93	2	0	2	8,875	100	2	0	2	8,987	101	2	0	2
	TFTM	89	8,586	96	2	0	2	9,250	104	2	0	2	9,367	105	2	0	2
	SYMDF	89	7,989	90	3	0	3	8,606	97	3	0	3	8,715	98	3	0	3
ASYDF	89	7,944	89	2	0	2	8,558	96	2	0	2	8,666	97	2	0	2	

Use the following to scale 70CRI to 80CRI.

CCT	Multiplier
3000K	0.909
4000K	0.886
5000K	0.865

All IES files available on product web page

LED Package	Distribution	System Watts	AMB (Wavelength)					LED Package	Distribution	System Watts	AMB (Wavelength)				
			Lumens	LPW	B	U	G				Lumens	LPW	B	U	G
P10	T2S	28	1,061	38	0	0	1	P30	T2S	28	1,975	71	0	0	1
	T2M	28	1,054	38	0	0	1		T2M	28	1,964	70	0	0	1
	T3S	28	1,083	39	0	0	1		T3S	28	2,016	72	0	0	1
	T3M	28	1,023	37	0	0	1		T3M	28	1,905	68	0	0	1
	T4M	28	1,044	37	0	0	1		T4M	28	1,944	69	0	0	1
	TFTM	28	1,088	39	0	0	1		TFTM	28	2,026	72	0	0	1
	SYMDF	28	1,012	36	1	0	1		SYMDF	28	1,885	67	1	0	1
	ASYDF	28	1,007	36	0	0	1		ASYDF	28	1,875	67	0	0	1

Options Matrix

Parameters		LED AMB	Options (Start with SF, DF, 2CI or EM if being used)													
			PE	P3	P7	PSC	PCLL	MASH	MASL	SF	DF	TP	10kV	AO	2CI	EM
LED Performance Package	P10	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y
	P20	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	P30	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	P40	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	P50	N	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y
Voltage	A5	Y	N	Y	Y	Y	Y	Y	Y	N	N	Y	Y	Y	Y	Y
	AH	Y	N	Y	Y	Y	N	N	N	N	N	Y	Y	Y	N	N
	12	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y
	20	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y
	24	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y
	27	Y	Y	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y
	34	Y	Y	Y	Y	Y	Y	N	N	Y	N	Y	Y	Y	N	N
48	Y	N	Y	Y	Y	Y	N	N	N	Y	Y	Y	Y	N	N	
Options	PE	Y		N	N	N	N	N	N	Y	Y	Y	Y	Y	N	Y
	P3	Y	N		N	M	Y	N	N	Y	Y	Y	Y	N	N	N
	P7	Y	N	N		M	Y	N	N	Y	Y	Y	Y	N	N	N
	PSC	Y	N	M	M		N	N	N	Y	Y	Y	Y	N	N	N
	PCLL	Y	N	Y	Y	N		N	N	Y	Y	Y	Y	N	N	N
	MASH	Y	N	N	N	N	N		N	Y	Y	Y	Y	N	N	N
	MASL	Y	N	N	N	N	N	N		Y	Y	Y	Y	N	N	N
	SF	Y	Y	Y	Y	Y	Y	Y	Y		N	Y	Y	Y	Y	Y
	DF	Y	Y	Y	Y	Y	Y	Y	Y	N		Y	Y	Y	Y	Y
	TP	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y		Y	Y	Y	Y
	10kV	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y		Y	M	M
	AO	Y	Y	N	N	N	N	N	N	Y	Y	Y	Y		N	N
	2CI	Y	P30	N	N	N	N	N	N	Y	Y	Y	M	N		N
EM	Y	Y	N	N	N	N	N	N	Y	Y	Y	M	N	N		

Notes

I = Included with option

M = Must have: one of these must be installed for the luminaire to operate

N = Combination Not available

P30 = Valid Option Combination, not available with P10 Performance Packabe



Y = Valid Option Combination

Photometric Diagrams



To see complete photometric reports or download .ies files for this product, visit the [Holophane's Wallpack FCO LED homepage](#). Isofootcandle plots for the HLWPC2 P30 40K. Distance are in units of mounting height (12"). Grid is 10'x10'.

0.1 fc 1 fc 0.2 fc 0.5 fc



HLWPC2 P30 40K XX T2S

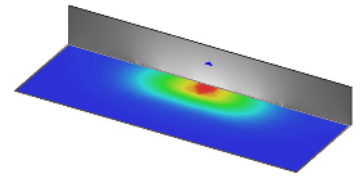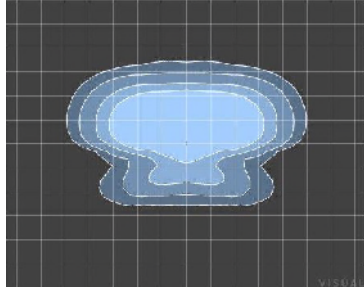



HLWPC2 P30 40K XX T2M

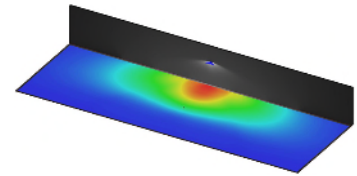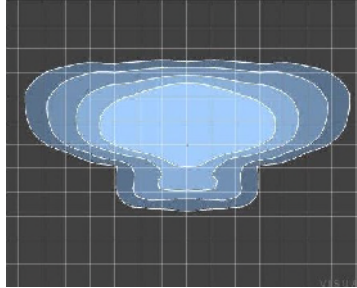



HLWPC2 P30 40K XX ASYDF

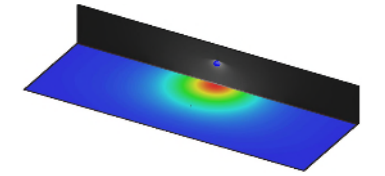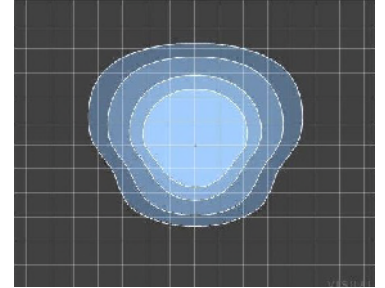



HLWPC2 P30 40K XX T3S

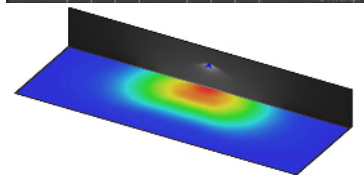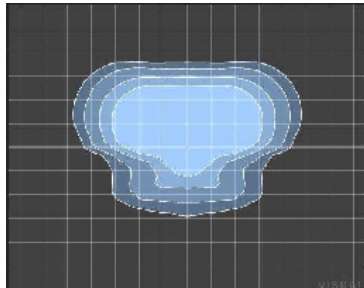



HLWPC2 P30 40K XX T3M

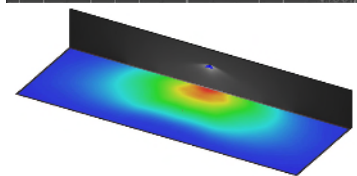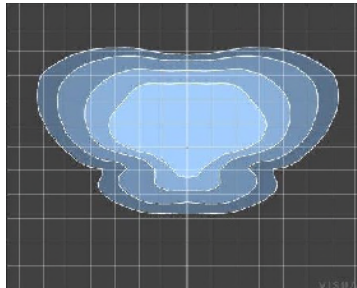



HLWPC2 P30 40K XX SYMDF

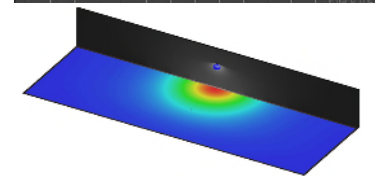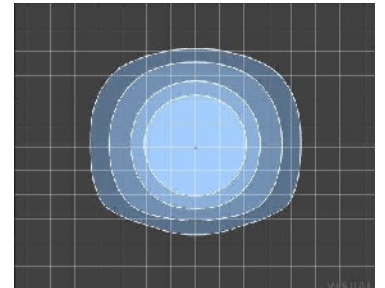

HLWPC2 P30 40K XX T4M

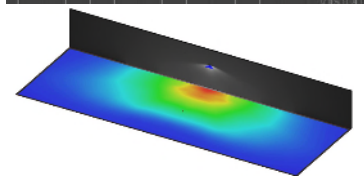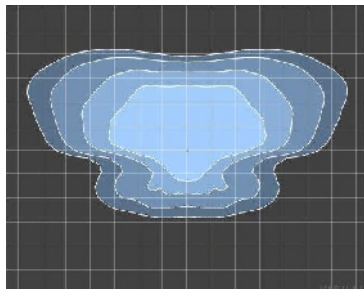


HLWPC2 P30 40K XX TFTM

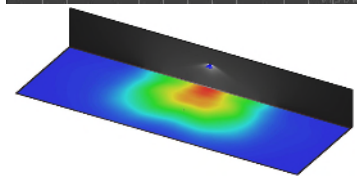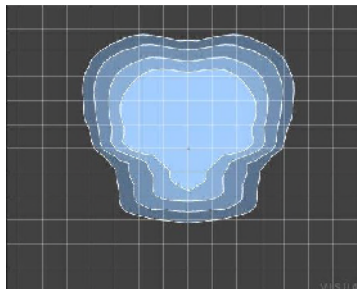

Coverage Pattern

8 to 15 ft. mounting: MASL
15 to 30 ft. mounting: MASH

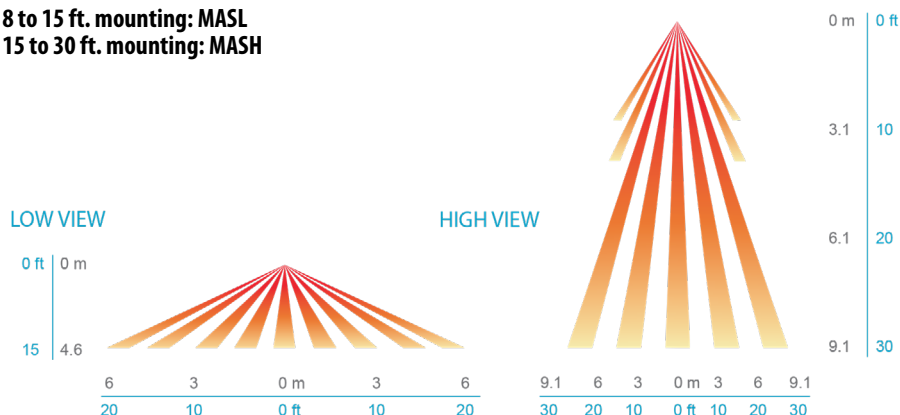

Control Options

Button Style Photocontrol

PE



N.E.M.A. Receptacle

P3

P7




Motion & Ambient Combined Sensor

MASL/MASH



Field Adjustable Output Module

The Field Adjustable Output (AO) module is an onboard device that adjusts the light output and input voltage to meet specific requirements, allowing a single fixture configuration to be flexibly applied in many different applications. The AO option is available on the HLWPC2 series.

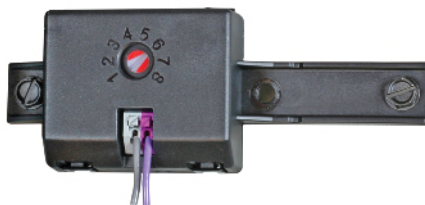

P10 - AS and AH		
AO Position	% Lumens	% Wattage
8	100%	100%
7	94%	95%
6	83%	82%
5	71%	69%
4	59%	57%
3	46%	45%
2	34%	33%
1	21%	21%

P20 - AS and AH		
AO Position	% Lumens	% Wattage
8	100%	100%
7	95%	94%
6	84%	80%
5	73%	67%
4	61%	54%
3	48%	42%
2	35%	30%
1	21%	18%

P30 - AS and AH		
AO Position	% Lumens	% Wattage
8	100%	100%
7	95%	94%
6	84%	80%
5	73%	67%
4	61%	54%
3	48%	42%
2	35%	30%
1	21%	18%

P40 - AS and AH		
AO Position	% Lumens	% Wattage
8	100%	100%
7	95%	95%
6	85%	82%
5	74%	68%
4	62%	55%
3	49%	43%
2	36%	30%
1	21%	17%

P50 - AS and AH		
AO Position	% Lumens	% Wattage
8	100%	100%
7	96%	95%
6	86%	81%
5	75%	68%
4	64%	55%
3	51%	42%
2	37%	29%
1	22%	17%