
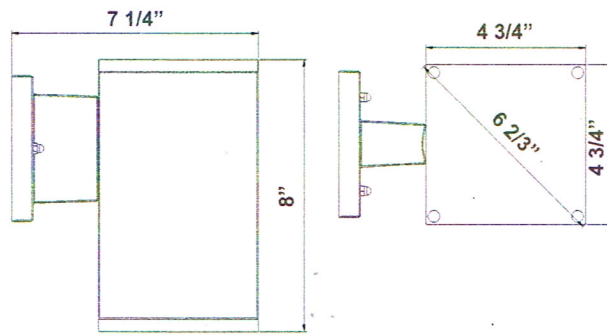


WMCS5 SERIES OUTDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

WMCS5-DL-MCT-BK-DD
WMCS5-DL-MCT-BR-DD
WMCS5-DL-MCT-BN-DD
WMCS5-DL-MCT-WH-DD

Customer Name: _____
Project Name: _____
Note: _____ Type: _____

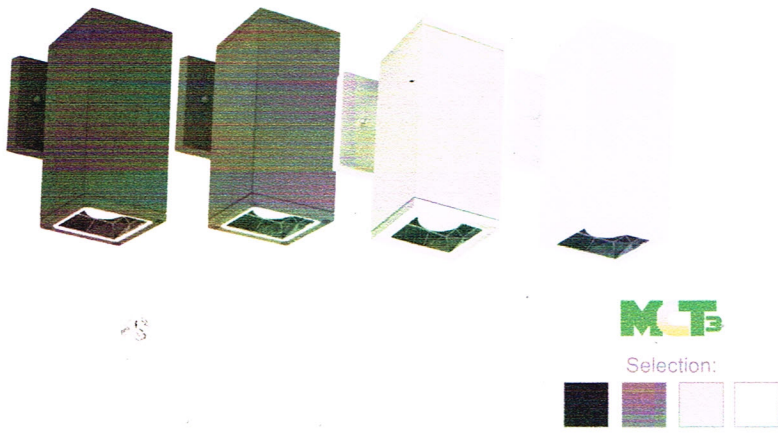

8"(H) x 4 3/4"(W) x 7 1/4"(D)

Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

Features

- Finish: Black, Bronze, Brushed Nickel & White
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- 7-Year Warranty
- Outdoor Down Light

Technical Specifications

Electrical:

- Voltage: 120-277V AC
- Power Factor: >0.95
- Wattage: 20W
- Efficacy: 80 LPW
- THD: <20%

Mechanical:

- Housing: Die-cast Aluminum & Glass
- Finish: Black, Bronze, Brushed Nickel & White
- Maximum Ambient Temperature: -68°F to 104°F
- IP Rating: IP65, Wet Location

Lighting:

- Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- Total Lumens: 960LM
- Color Temperatures: 3000K/4000K/5000K
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 hrs
- Beam angle: 45°

Applications:

- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

Other Models:

- 40W | 1920LM | WMCS-UDL-MCT-BK-DD
- 40W | 1920LM | WMCS-UDL-MCT-BR-DD
- 40W | 1920LM | WMCS-UDL-MCT-BN-DD
- 40W | 1920LM | WMCS-UDL-MCT-WH-DD



Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



WGS-02152022